


Technical data sheet

Heavy-duty cable tray SGR 105 G

Item number: 6002616

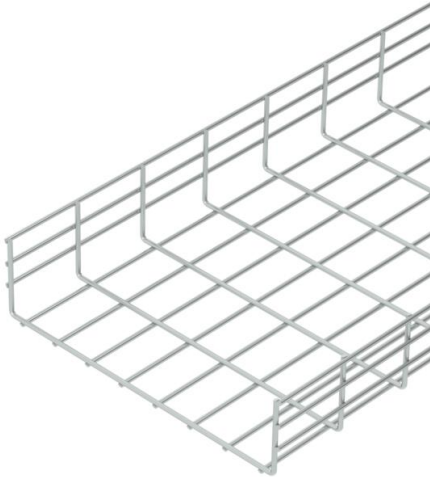

Mesh cable tray made of spot-welded steel wire of side height 105 mm.
The grid dimension is 50 x 100 mm.

Magnetic shield insulation without cover 15 dB, with cover 25 dB.



- St

Steel
- G

Electrogalvanized

Master data		
Item number	6002616	
Type	SGR 105 400 G	
Description 1	Mesh cable tray SGR	
Manufacturer	OBO	
Dimension	105x400x3000	
Colour	zinc	
Material	Steel	
Surface	Electrogalvanized	
Surface standard	EN ISO 19598 / EN ISO 4042	
Smallest sales unit	3	
Unit of quantity	Metre	
Weight	426.333 kg	
Weight unit	kg/100 m	
CO2 Footprint (GWP) Cradle-to-Gate	8,14 kg CO2e / 1 Meter	


Technical data sheet

Heavy-duty cable tray SGR 105 G

Item number: 6002616



Dimensions

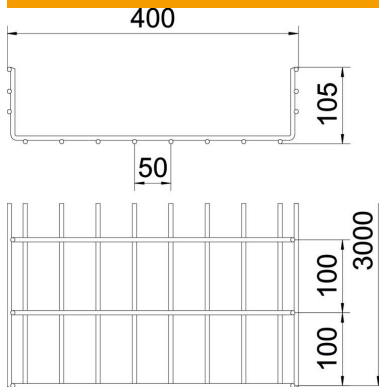

Length	3,000 mm
Width	400 mm
Width	15.75 in
Height	105 mm
Height	4.13 in
Dimension B	400 mm

Technical data

Connector version	Without connectors
Mounting system fastening type	Ceiling Wall
Maintain electrical functions	no
Integrated partition	Without
Usable cross-section	363 cm ²
Usable cross-section	36300 mm ²
Profile shape	U-shaped
Rustproof steel, pickled	no
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

Technical data sheet


Heavy-duty cable tray SGR 105 G

Item number: 6002616



Loads

Insertable support spacings, min.	4 m
Support spacing 1.0 m	3.5 kN/m
Support spacing 1.5 m	1.9 kN/m
Support spacing 2.0 m	1.2 kN/m
Support spacing 2.5 m	0.85 kN/m
Support spacing 3.0 m	0.7 kN/m
Support spacing 3.5 m	0.62 kN/m
Support spacing 4.0 m	0.45 kN/m

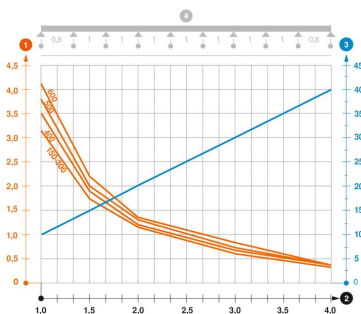

Load diagram, mesh cable tray, type SGR 105

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width