


Technical data sheet

Empty housing X 16 with hat profile rail

Item number: 2005498



Junction box with hat profile rail for the connection of cables and lines indoors and in outdoor areas. Rectangular design without entries. Suitable for wall and ceiling mounting with the option to fasten outside, inside or to mount via the corner domes. Particularly impact resistant with IK09. Cover with quick lock, sealable. Made from halogen-free and UV-resistant materials.

With hat profile rail 2069 and fastening set.

Junction box according to DIN EN 60670. Impact resistance IK09 according to DIN EN 50102. Protection rating IP67 according to DIN EN 60529.

PC

Polycarbonate

Master data		
Item number	2005498	
Type	X16C R LGR	
Description 1	Empty Enclosure	
Description 2	with rail 2069	
Manufacturer	OBO	
Dimension	240x191x125	
Colour	Light grey; RAL 7035	
Material	Polycarbonate	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	87.3 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	3,2922 kg CO2e / 1 Piece	


Technical data sheet

Empty housing X 16 with hat profile rail


Item number: 2005498



Dimensions

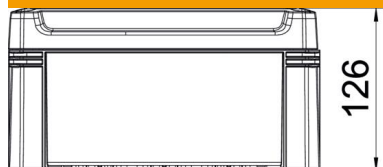

Length	241 mm
Width	191 mm
Height	126 mm

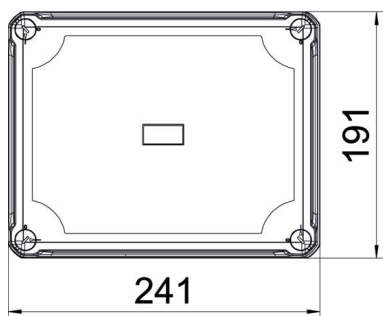

Technical data

Extension option	no
Cover fastening	Screwed
Shape	Rectangular
Suitable for outdoor use	yes
Clear internal dimensions with lid	227x177x110 mm
Mounting type	yes
Protection rating	Surface-mounted
Protection rating IK code	IP67
Protection class	IK09
Permitted temperature range, max.	II
Permitted temperature range, min.	60 °C
Weatherproof	-5 °C
	yes